Sizes	800x2000mm | 1000x2000mm 1200x1200mm | Bespoke
Free Area	1m² or 1.5m²

SV-W-GL1

The SV-W-GL1 Louvre Window is preferred by many clients due to its outstanding advantages in regard to ventilation, weather tightness and thermal protection, as well as s a high degree of security (burglar proof RC2). The glass louvres are framed with aluminium profiles.





Blades

Double or triple insulation glass (glass thickness 28 mm or 32 mm). Various combinations of glass with regard to thermal insulation or protection. Sandwich panels in various combinations also available.



Certification

Certified and tested in accordance to EN 12101-2

CE

Applications

- End of Corridor
- Head of Stairwell

Part Codes


SV-W-GL1-800X2000	AOV Glazed Wall Louvre 800x2000mm 1.19m²
SV-W-GL1-1000X2000	AOV Glazed Wall Louvre 1000x2000mm 1.54m²
SV-W-GL1-1200X1200	AOV Glazed Wall Louvre 1200x1200mm 1.08m²

* Alternative sizes are available

Technical Data

Frame	Aluminium profiles, thermal broken
Blades	Insulated glass | Solid infil
Geometric Free Area	1m² or 1.5m² (depending on vent size)
Voltage	24V DC
Opening	84°
Opening Speed	> 60 secs
Current Consumption	0.7 Amp
Colour	Custom RAL colour
Certification	EN 12101-2
Cable Dimension	2-Core
Delivery Includes	1 x Vent & 1 x Actuator

Dimensions

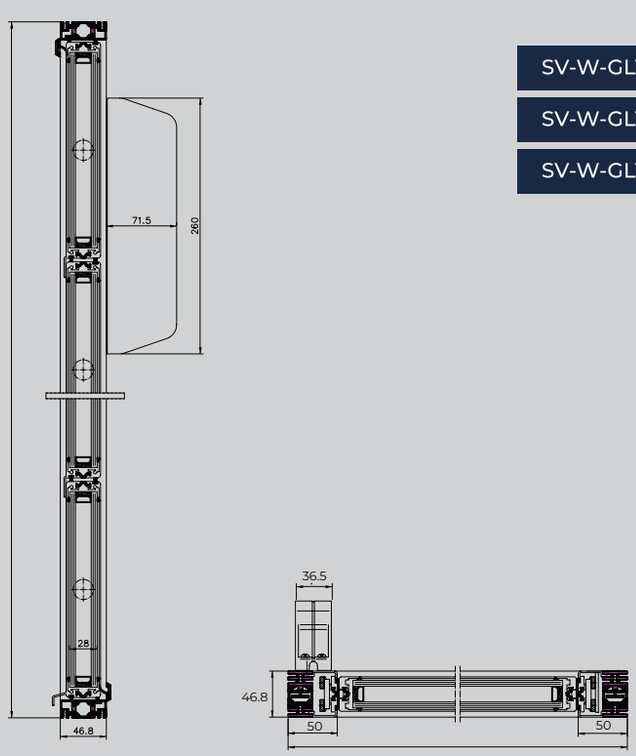

	W	H
SV-W-GL1-800X2000	800mm	2000mm
SV-W-GL1-1000X2000	1000mm	2000mm
SV-W-GL1-1200X1200	1200mm	1200mm