Sizes	Bespoke
Free Area	1m² or 1.5m²

SV-W-W1


SV-W-W1 AOV bottom hung window's are used as part of a natural smoke ventilation system. The main function of smoke exhaust windows is to remove smoke from communal areas such as lobbies and/or stairwells.





Design

Actuator type and opening angle and direction appropriately selected to meet required free area(s).

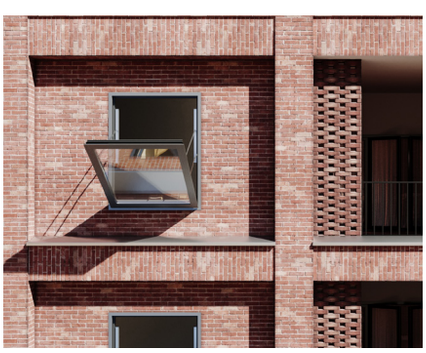

Certification

Certified and tested in accordance to EN 12101-2

CE

Applications

- End of Corridor
- Head of Stairwell

Technical Data

Frame	Aluminium
Glass	Double Glazed (Standard) or Triple Glazed
Geometric Free Area	1m² or 1.5m² (depending on vent size)
Voltage	24V DC
Opening	40-60°
Opening Speed	> 60 secs
Current Consumption	2 - 5.2 Amp (depending on vent size)
Colour	Custom RAL colour
Certification	EN 12101-2
Cable Dimension	2-Core
Delivery Includes	1 x Vent & 2 x Actuators

Dimensions

