


VANGUARD

M/NM EMERGENCY BULKHEAD

Vanguard emergency bulkheads can be configured for either maintained or non-maintained operation with selectable self test / manual test operation. Featuring a hinged gear tray for easy installation and a prismatic lens offering superior spacings for both escape route and open area lighting. LiFePO4 batteries ensure a longer and more reliable service life.

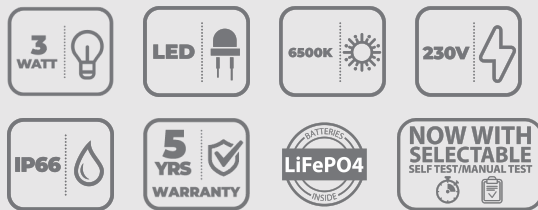

Features

- LiFePO4 Battery Technology
- 3 Hours Emergency
- Selectable Self Test / Manual Test Emergency
- IP66

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
VAN/3/ST/V2	Vanguard M/NM Emergency Bulkhead 3Hr IP66 Selectable ST/M	150lm	150 lm	3W	

Product Information

Warranty	5 Years
Emergency Battery Warranty	5 Years
On-Site Warranty	2 Years
Colour Appearance (CCT)	6500K
IP Rating	IP66
IK Rating	IK08
Emergency Battery Type	LiFePO4
Voltage	220-240V
Material (Body/Housing)	ABS
Material (Diffuser/Cover)	Polycarbonate

Colour Finish	White RAL9003
LED Life Expectancy	36,000 Hours
Power Factor	>0.3
Frequency	50/60Hz
Driver Type	Fixed
Approval	UKCA CE
Electrical Class	Class II
Working Temperature	0°C to 45°C
EM Working Temperature	0°C to 45°C



VANGUARD

M/NM EMERGENCY BULKHEAD

Packaging Information

Dimensions (mm)	L: 351 x W: 111 x D: 63 mm
Product Net Weight (kg)	0.49 kg
Barcode	5055807628198
Box Dimensions (mm)	L: 357 x W: 115 x D: 70 mm
Box Gross Weight (kg)	0.59 kg

Units/Outer Carton	10
Outer Carton Barcode	15055807628195
Outer Carton Dimensions (mm)	L: 605 x W: 375 x D: 155 mm
Outer Carton Gross Weight (kg)	6.7 kg

