

Electronic Bells

Data Sheet



Notifier by Honeywell offers an electronic bell for a wide range of applications. The combination of a miniature solenoid with an integrated control circuit allows excellent sound coverage, minimum current consumption and increased reliability. The improved aesthetics make the bell suitable for all applications including the most prestigious locations.

EN 54-3 compliant electronic bells for a wide range of applications. Available in red or grey metal casing and suitable for both semi flush and surface mounting.

Key Features

- Modern design
- Clip together assembly
- Weatherproof kit option
- High “ring” output

Benefits

- Suitable for all locations
- Easy to fit
- Provides protection up to IP44C with weather resistant option
- Easily identified signal

Electronic Bells

EN 54-3 compliant electronic bells for a wide range of applications. Available in red or grey metal casing and suitable for both semi flush and surface mounting.



Specifications

Electronic Bells - 04390-41

Electrical Specification

Voltage:	12Vdc	24Vdc	240Vac
Current:	55 - 65mA	25 - 35mA	20 - 30mA
Sound Output:	93 - 95dB(A)		
Monitoring:	Reverse polarity (dc only)		


Mechanical Specification

Construction:	Gong -steel, base - polycarbonate		
Weight:	1.1kg	1.1kg	1.2kg
Colours:	Gong - Red or Grey, Base - Black		

Environmental Specifications

Temperature:	- 25°C to + 70°C
Protection:	IP21C / IP44C (Weather Resistant Option)

Dimensions (mm)

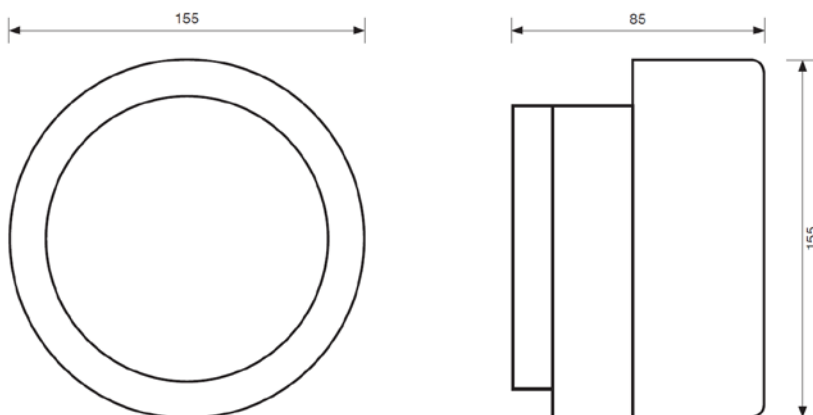

Product Range at a Glance

		Part Number
	Electronic Solenoid Bell 24V DC, Red IP21	74430-88NM
	Electronic Solenoid Bell 24V DC, Red Weather Resistant IP44	74432-88NM
	Electronic Solenoid Bell 230V AC Grey Weather Resistant IP44	74333-50NM
	Electronic Solenoid Bell 12V DC, Grey IP21	74431-66NM