WEATHERGUARD SITE TRIPOD HEAD

IP65 NON-CORROSIVE FITTINGS C/W TRIPOD HEADS & TRIPOD

Weatherguard Site tripod mounted fittings offer ultimate flexibility on site. The heads are supplied ready to mount onto the tripod, complete with 2x110V power outlets and 5m of cable.





Features

- Fast and easy to set up on site
- Fitted with twin 110V sockets
- Pre-wired with 5m cable and plug
- IP65 and IK07 rated
- Unique, future proof replaceable LED module

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
WGS220Y-E/TH	Weatherguard Site Tripod Head 600mm c/w 3HR Emergency	2000lm	180 lm	20W	100 lm/W

Product Information

Warranty	3 Years
Emergency Battery Warranty	3 Years
Colour Appearance (CCT)	4000K
IP Rating	IP65
IK Rating	IK07
Emergency Battery Type	LiFePO4
Voltage	110V
Material (Body/Housing)	Polycarbonate
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra >80

Colour Finish	Yellow RAL1007
LED Life Expectancy	L80B50 30,000 Hours
Power Factor	0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	0°C to 40°C
EM Working Temperature	0°C to 40°C

Tel: 0114 279 8999 | **Email: sales@redarrowelectrical.co.uk** | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 21/10/26

WEATHERGUARD SITE TRIPOD HEAD

IP65 NON-CORROSIVE FITTINGS C/W TRIPOD HEADS & TRIPOD


Packaging Information


Dimensions (mm)	L: 664 x W: 103 x D: 78 mm
Product Net Weight (kg)	3.03 kg
Barcode	5055807623681


Box Dimensions (mm)	L: 690 x W: 195 x D: 110 mm
Box Gross Weight (kg)	3.4 kg





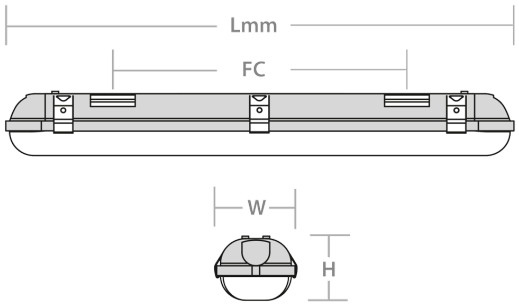

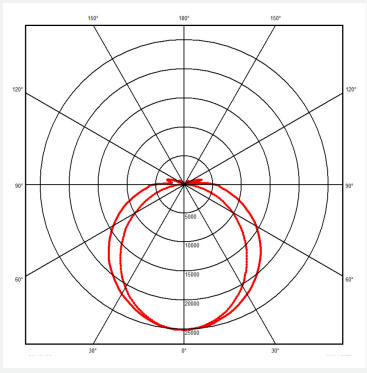

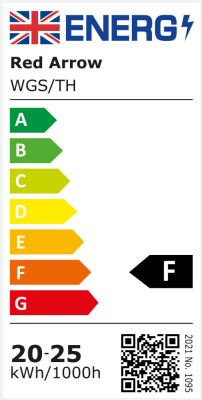

This document is uncontrolled if printed, all information is subject to change. Generated on 21/10/26